

(19) 日本国特許庁 (J P)

(12) 公表特許公報 (A)

(11) 特許出願公表番号

特表平10-510158

(43) 公表日 平成10年(1998)10月6日

(51)Int.Cl. ⁵	識別記号	F I	
C 1 2 M 1/00		C 1 2 M 1/00	Z
B 0 3 C 1/28		B 0 3 C 1/28	
C 1 2 N 15/00		C 1 2 Q 1/69	A
C 1 2 Q 1/69		C 1 2 N 15/00	A
		審査請求	未請求
		予備審査請求	有
		(全 48 頁)	
(21)出願番号 特願平8-517831		(71)出願人 ガメラ・バイオサイエンス・コーポレイシ ョン アメリカ合衆国02155マサチューセッツ州 メッドフォード、ボストン・アベニュー 200番	
(86) (22)出願日 平成7年(1995)12月8日		(72)発明者 マイアン, アレック アメリカ合衆国03139マサチューセッツ州 ケンブリッジ、マガジン・ストリート 137番	
(85)翻訳文提出日 平成9年(1997)6月9日		(74)代理人 弁理士 青山 薫 (外2名)	
(86)国際出願番号 P C T / U S 9 5 / 1 6 2 5 6			
(87)国際公開番号 W O 9 6 / 1 7 9 5 9			
(87)国際公開日 平成8年(1996)6月13日			
(31)優先権主張番号 0 8 / 3 5 3 , 5 7 3			
(32)優先日 1994年12月9日			
(33)優先権主張国 米国 (US)			


最終頁に続く

(54) 【発明の名称】 磁気サイクル反応を行うための装置

(57) 【要約】

本発明は、電磁場による核酸鎖の分離に基づいて、特定の核酸配列の増幅方法を行うための装置を提供する。この分離手段は、増幅方法における中温ポリメラーゼの使用を可能とし、それによって、その増幅方法の速度および正確さ、さらにはまた、増幅することができる標的核酸の大きさを増大させる。

Figure 2A

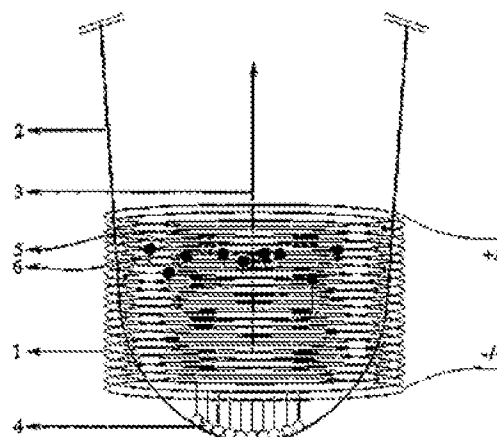

* NOTICES *

JPO and INPIT are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.*** shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

1. It is a device for performing a magnetic cycle reaction, (a) A temperature control means of a temperature control sample block (some magnetic cycle reaction sample tubes are attached in sample tube WERU) containing a plate containing sample tube WERU of a large number located in a line in a row, and a sample block;
 (b) The 1st magnetism element and its 1st magnetism element are located a sample block top and near it, A flow of current which passes along a wire which the 1st magnetism element contains a coil of a large number located in a line in a row, and the coil contains an electrical conduction wire of many volumes in the surroundings of an elasticity iron core, and contains the coil produces a magnetic field around the 1st magnetism element;
 (c) The 2nd magnetism element and its 2nd magnetism element are located the bottom of a sample block, and near it, A flow of current which passes along a wire which the 2nd magnetism element contains a coil of a large number located in a line in a row, and the coil contains an electrical conduction wire of many volumes in the surroundings of an elasticity iron core, and contains the coil produces a magnetic field around the 2nd magnetism element.;
 A control device containing a microprocessor and its control device (d) A temperature control sample block, And it is connected effective in each of the 1st magnetism element and the 2nd magnetism element, The control device is connected effective also in a user interface again, A device included combining a power supply which the control device is connected effective in; and the (e) control device which control a flow of current which passes along each magnetic element, and temperature of a temperature control sample block, and supplies electric power to a device.
2. Use the device according to claim 1, it is how to perform a magnetic cycle reaction for amplifying a specific DNA fragment, include (a) solid phase primer in a nucleic acid chain complementary to target nucleic acid, and make a solid phase chain combined with target nucleic acid.;
 (b) Separate a solid phase chain and target nucleic acid.;
 (c) Include a magnetic primer in a nucleic acid chain complementary to a solid phase chain, and obtain a double chain which has one solid phase chain and one magnetic chain.;
 (d) Separate a solid phase chain from a magnetic chain by applying an electromagnetic field of sufficient intensity to dissociate a double chain by generating a magnetic field in the 1st magnetism element of the device according to claim 1.;
 (e) Make a solid phase chain anneal a magnetic primer complementary to a solid phase chain, and make a magnetic chain anneal a complementary solid phase primer to a magnetic chain by applying an electromagnetic field by generating a magnetic field in the 2nd magnetism element of the device according to claim 1.;
 (f) A way only the number of times required to elongate an annealed primer by suitable DNA polymerase, and obtain amplification DNA of quantity of; and the (g) request includes repeating a process of (d) – (f).

3. Use the device according to claim 1, it is a method for amplifying specific single strand target nucleic acid, include (a) magnetism primer in a nucleic acid chain complementary to target nucleic acid, and make a magnetic chain combined with target nucleic acid.;
- (b) Separate a magnetic chain and target nucleic acid.;
- (c) Include a solid phase primer in a nucleic acid chain complementary to a magnetic chain, and obtain a double chain which has one solid phase chain and one magnetic chain.;
- (d) Separate a solid phase chain from a magnetic chain by applying an electromagnetic field of sufficient intensity to dissociate a double chain by generating a magnetic field in the 1st magnetism element of the device according to claim 1.;
- (e) Make a solid phase chain anneal a magnetic primer complementary to a solid phase chain, and make a magnetic chain anneal a complementary solid phase primer to a magnetic chain by generating a magnetic field in the 2nd magnetism element of the device according to claim 1.;
- (f) A way only the number of times required to elongate an annealed primer by suitable DNA polymerase, and obtain amplification DNA of quantity of; and the (g) request includes a process of repeating a process of (d) – (f).
4. Use the device according to claim 1, it is a method for amplifying specific double strand target nucleic acid, separate a chain of (a) target nucleic acid, and obtain the 1st chain and 2nd chain.;
- (b) Include a solid phase primer in a chain complementary to the 1st chain, obtain the 1st heteroduplex that has the 1st chain and solid phase chain, and include a magnetic primer in a chain complementary to the 2nd chain, and obtain the 2nd heteroduplex that has the 2nd chain and magnetic chain.;
- (c) Separate the 1st heteroduplex and 2nd heteroduplex.;
- (d) Make a solid phase chain anneal a magnetic primer complementary to a solid phase chain, and make a magnetic chain anneal a complementary solid phase primer to a magnetic chain.;
- (f) elongating an annealed primer by suitable DNA polymerase —; and (g) — separating a solid phase chain from a magnetic chain by applying an electromagnetic field of sufficient intensity to dissociate a double chain by generating a magnetic field in the 1st magnetism element of the device according to claim 1 —;
- (h) Make a solid phase chain anneal a magnetic primer complementary to a solid phase chain, and make a magnetic chain anneal a complementary solid phase primer to a magnetic chain by generating a magnetic field in the 2nd magnetism element of the device according to claim 1.;
- (i) A way only the number of times required to elongate an annealed primer by suitable DNA polymerase, and obtain amplification DNA of quantity of; and the (j) request includes a process of repeating a process of (g) – (i).

[Translation done.]